


HIMOS SERIES / HI577P – HI577



CONNECTIONS

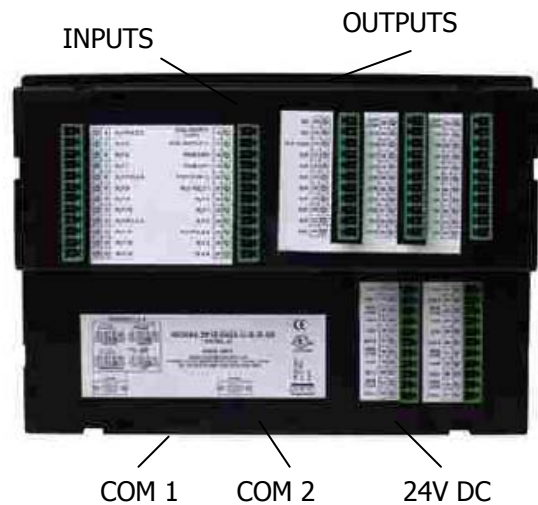

MODEL

	HI577P/HI577
DISPLAY	320x240 pixel (5.7") STN CCFL QVGA Color
KEYS / LEDS	Touch Screen
DIGITAL INPUTS	28
DIGITAL OUTPUTS	16
RELAYS OUTPUTS	-
ANALOGUE INPUTS	4
ANALOGUE OUPUTS	2
DIMENSIONS	193 x 136 x 58 mm

OPERATION

The Microsoft Windows® based configuration software, *HIMOSOFT*, helps user to configure HIMOS unit. 'Configuration' means making the HIMOS unit work as per the system requirements. For example, HIMOS can be configured to be used with any PLC, display any register data, perform any controlling action depending on digital or analog inputs.

HIMOS Keys can be configured to realize different tasks as for example execution of a ladder program, activate/deactivate coils or outputs, operations between registers, etc.

Alarms can be defined to constantly monitor any register. When alarm condition is reached, the respective alarm is displayed in alarm window.

Screens can be controlled by any system register. Tasks can be defined to realize these operations.

HI577 model have Data Logging capacity, and like all HIMOS models also feature Real Time and Historical Trending.

DESCRIPTION


The HIMOS unit has both HMI capabilities as well as programmable logic features. The user can implement PLC logic using standard ladder logic programming. The HIMOS unit has four high speed counters (25 kHz each), hundreds of timers and counters, thousands of internal coils, retentive and non retentive memory registers and PID functionality.

HI577 model has 28 digital inputs, 16 digital outputs as well as 4 analogue inputs and 2 analogue outputs. The number of I/O can also be expanded through the use of remote I/O modules.

HI577 has 2 serial communication ports. Direct connection to Modbus RTU protocol and other opened protocols and to most of PLC's. They can communicate with two different PLC's simultaneously.

PLC task can be executed on power up, during continuous scanning, when a specific screen is showing, or when a specific wizard event occurs. Allows local or global assignation of keys to macros for key processes. Development tool *HIMOSOFT*, valid for all the HIMOS Series, is available (free download) on our website www.ditel.es.

MOUNTING

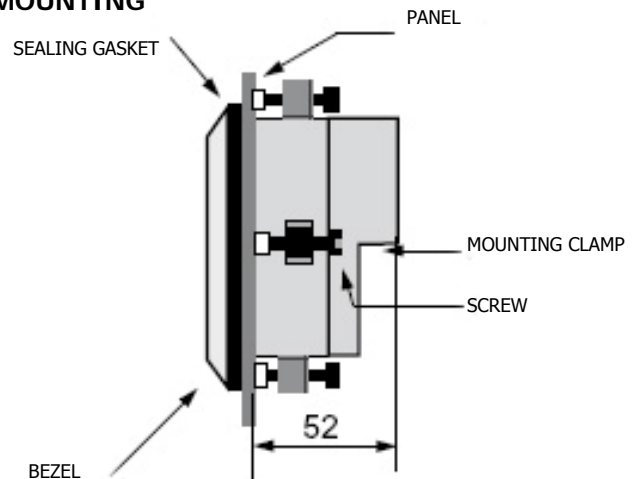

PANEL CUTOUT: 184X 126 mm ±0.5 mm

HIMOS SERIES / HI577P — HI577

GENERAL TECHNICAL CHARACTERISTICS

HIGH SPEED COUNTERS	
Number of Counters	4
Resolution	32 bit
Maximum Frequency	25kHz @ 24V DC
Minimum Pulse	20 microseconds
DIGITAL INPUTS	
Input Voltage	24V DC (28V Max.)
Input Impedance	Normal: 4K7 Ω @ 24V DC High Sp.: 2K3 Ω @ 24 V DC
Logic "0" Voltage	0 a 4 V
Logic "1" Voltage	14 a 28V
Input Current (@24V)	Normal: 4,89 mA High Speed: 10 mA
DIGITAL OUTPUTS	
Outputs type NPN (HI577)	Open Collector
Output Current	300 mA
On Voltage Drop	0,4 V DC
Outputs type PNP (HI577P)	Open Collector
Output Current	300 mA
On Voltage Drop	0,4 V DC
ANALOGUE INPUTS (mV, mA, Pt100, TC)	
Resolution	12 bit
Ranges	V: 0—50mV, 0—100mV A: 0—20mA, 4—20mA RTD: 3 wires RTD TC: B, R, S, E, J, K, N y T
ANALOGUE OUTPUTS	
Output type	4—20mA, 0—10V
Resolution	12 bit
DISPLAY	
Type	STN CCFL QVGA 256 Colours 320x240 píxel (5,7")
COMMUNICATION	
Number of Ports	2
Type	RS232/RS485/RS422/CMOS
MEMORY	
Total Memory	4 Mb
Application Memory	3264 Kb
Ladder Memory	128 Kb

Data Registers	1000
Retentive Registers	1400
System Registers	64
System Coils	100
Internal Coils	5000
Input Coils	100
Output Coils	100
Internal Registers	313
Input Registers	7
Output Registers	7
Timer Registers	128
Counter Registers	178
POWER SUPPLY	
Voltage Rating	24V DC \pm 10%, 10W Max
MISCELLANEOUS	
Battery	Coin Type, 3v Lithium 614-CR-1225FH
Battery Backup	Min. 5 years for RTC and System Data
Operating Temperature	0° a 50 °C
Storage Temperature	-25° a 80 °C
Mounting Method	Panel Mounting
Clock (RTC)	Real Time Function (Date & Time)
Humidity	10% to 90% (Non condensed)
Immunity to ESD	Level 3 (IEC1000-4-2)
Immunity to transients	Level 3 (IEC1000-4-4)
Immunity to Radiated RF	Level 3 (IEC1000-4-3)
Immunity to conducted RF	Level 3 (IEC1000-4-6)
Emission	EN55011 CISPR-A
Front Panel Protection	IP65



Diseños y Tecnología S.A.
 C/ Xarol 8-C P.I. Les Guixeres
 08915 Badalona - Spain
 Tel. +34 933 394 758 / Fax. +34 934 903 145
 Email: dtl@ditel.es
 Web: www.ditel.es