

PICA-P

INSTRUCTIONS MANUAL



DESCRIPTION

- INDICATOR for:
- PROCESS ($\pm 0-10V$, $\pm 20mA$)
- VOLTS DC ($\pm 200.0V$ and $20.00V$)
- AMP DC (shunt ext.)
- mV ($\pm 100mV$)

48 x 24 mm frontal


Panel meter for indication of volts, mA and mV DC, completely programmable.

Display range -1999 ÷ 9999, programmable decimal point.

Three keys keyboard situated on the bottom of the display.

PROGRAMATION

Display range: Input	$\pm(0-10V)$	$\pm(0-20mA)$	-1999 ÷ 9999
Display range: Input	$\pm(50/60/100mV)$		-1999 ÷ 9999
Display range: Input			calibrated -199.9 ÷ 199.9
Display range: Input			calibrated -19.99 ÷ 19.99

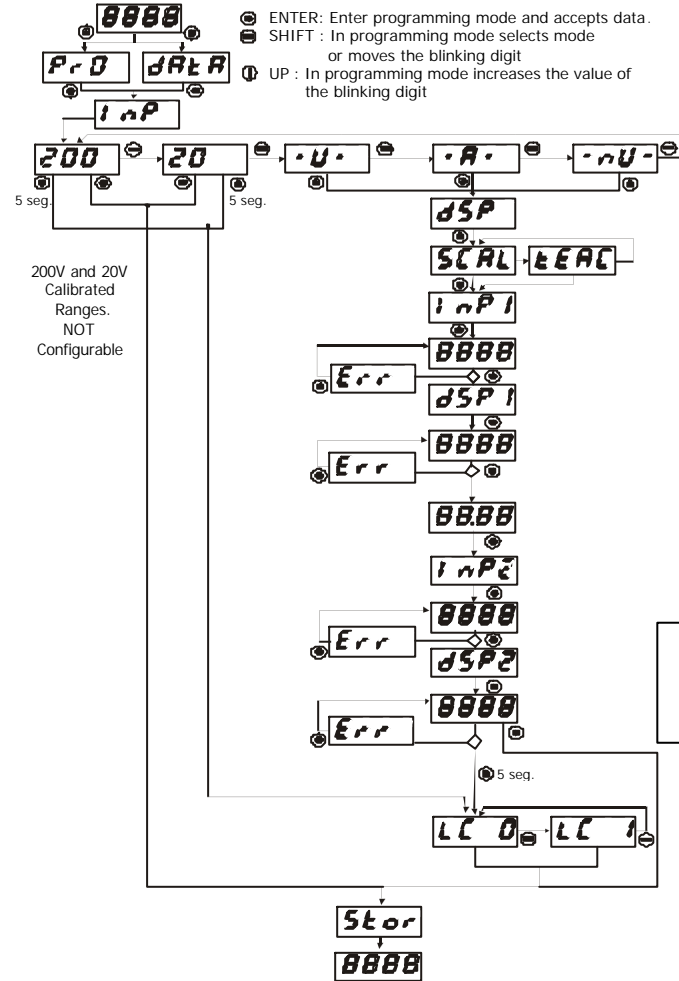

SCAL: Programming method introducing InP1 and InP2 values by keyboard.
tEAC: Programming method where instrument learns actual values of InP1 and InP2.
InP1, InP2: Input signal values corresponding to desired display dSP1 and dSP2.
dSP1: Display value corresponding to InP1.
dSP2: Display value corresponding to InP2.
LC0: Programming unlocked.
LC1: Programming totally locked. (Show all parameters like dAtA).

WARRANTY

All products are warranted against defective material and workmanship for a period of three years from date of delivery.
 If a product appears to have a defect or fails during the normal use within the warranty period, please contact the distributor from whom you purchased the product.
 This warranty does not apply to defects resulting from action of the buyer such as mishandling or improper interfacing.
 The liability under this warranty shall extend only to the repair of the instrument; no responsibility is assumed by the manufacturer for any damage which may result from its use.

TECHNICAL CHARACTERISTIQUES

INPUT	VOLTAGE	CURRENT
Range	$\pm 200V$	$\pm 20mA$
Resolution	0.1V	0.01mA
	$\pm 10V$	$\pm 20mA$
	1mV	0.01mA
	$\pm 100mV$	$\pm 20mA$
	0.1mV	0.01mA

INPUT IMPEDANCE

Volts	1M Ω
mV	100M Ω
mA	12, 1 Ω

ACCURACY at 23°C $\pm 5^\circ C$

Max Error	$\pm(0.1\%$ of reading + 3 digits)
Temperature coefficient	100 ppm/ $^\circ C$
Warm up	5 minutes

POWER SUPPLY AND FUSES (DIN 41661) (Not supplied)

PICA-P 85-265 VAC 50/60 Hz and 100-300VDC .. F 0.1A/ 250V
PICA-P6 21-53 VAC 50/60Hz and 10,5-70VDC..... F 0.5A/ 250V

CONVERSIÓN

Technical	Sigma-Delta
Resolution	± 15 bits
Rate	25/ s

DISPLAY

Range	-1999 ÷ 9999
Type	4 dígitos rojos 10mm
Reading rate	4/s
Overflow indication	Over


ENVIRONMENTAL

Operating temperature	-10 $^\circ C$ ÷ +60 $^\circ C$
Storage temperature	-25 $^\circ C$ ÷ +85 $^\circ C$
Relative humidity (non condensed)	<95% ÷ 40 $^\circ C$
Maximum altitude	2000m.
Panel sealing	IP65

INSTALACION AND CONECTION

DIMENSIONS

Dimensions	48 x 24 x 70mm.
Panel cutout	45 x 22mm.
Weight	50g.
Case material	Polycarbonate s/ UL 94 V-0

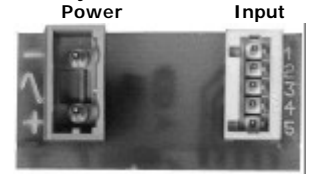

Back view

Keyboard detail (bottom view)



- IN (COMMON).
- +(50/ 60/ 100) mV DC.
- +20mA
- +(10/ 20)V DC
- +200V DC



WARNING

In order to guarantee electromagnetic compatibility, the following guidelines for cable wiring must be followed:

Power supply wires must be routed separated from signal wires. **Never** run power and signal wires in the same conduit.
 Use shielded cable for signal wiring and connect the shield to ground.
 The cable section must be ≥ 0.25 mm²

INSTALLATION

To meet the requirements of the directive EN61010-1, where the unit is permanently connected to the mains supply it is obligatory to install a circuit breaking device easy reachable to the operator and clearly marked as the disconnect device.

CLEANING: The frontal cover should be cleaned only with a soft cloth soaked in neutral soap product.

DO NOT USE SOLVENTS

Manufacturer : DITEL - Diseños y Tecnología S.A.
 Address : Travessera de les Corts, 180

08028 Barcelona
 ESPAÑA



Declares, that the product :

Description : Digital panel meter
 Model : **PICA-P**

Conforms with the directives: EMC 89/336/CEE
 LVD 73/23/CEE

Applicable Standards: **EN50081-1** Generic emission.
 Applicable Standards: **EN50082-1** Generic immunity.
 Applicable Standards: **EN61010-1** Generic safety.

Date: 30 April 2001

Signed: José M.Edo

Charge: Technical Manager

