




NA6PLUS - DIGITAL METER WITH BARGRAPH

- 3 or 7-colour bargraph with programmable colour switching over.
- Logging of the measured signal in programmed time intervals (800 samples).
- 2 independent measuring channels with universal input.
- Programmable indication characteristic (21-point rescaling) and bargraph magnifier.
- Up to 8 programmable alarm outputs.
- Alarm triggered by the rate of change of the measured signal over time.
- Mathematical operations on channels.
- Communication in SCADA systems (RS485/Modbus interfaces).
- Conversion of any measured value into a current or voltage analog signal.

EXAMPLE OF APPLICATION

Level and temperature measurement in the tank.

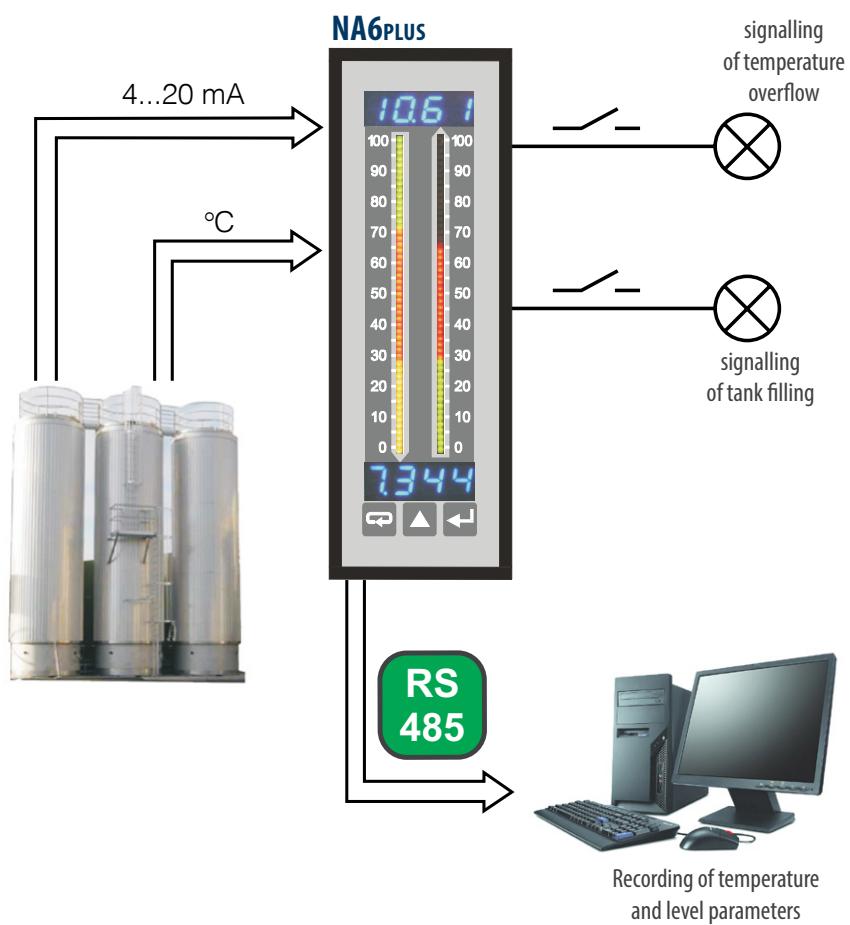

FEATURES	INPUTS	OUTPUTS	GALVANIC ISOLATION
MODBUS RTC 21 points chart. Password protection IP50 eCon	DC 0 .. 20 mA U 60 mV Ω 0.10 V	0 .. 20 mA 0..10 V ΦU RS 485 RS 485 K	RS 485 Supply

TECHNICAL DATA

INPUTS

Input type	Measurement range	Basic error	Additional error
Pt100	-200...850°C		
Pt500	-200...850°C		
Pt1000	-200...850°C		
J (Fe-CuNi)	-100...1100°C		compensation of temperature changes of reference welds ≤ ±1°C
K (NiCr-NiAl)	-100...1370°C		compensation of cable resistance changes
N (NiCrSi-NiSi)	-100...1300°C		- when changing the resistance of wires < 10Ω the error is ≤ ±0.5°C
E (NiCr-CuNi)	-100...850°C		- when changing the resistance of wires < 20Ω the error is ≤ ±1°C
R (PtRh13-Pt)	0...1760°C		
S (PtRh10-Pt)	0...1760°C	0.2%	
T (Cu-CuNi)	-50...400°C		
Resistance	0...5 kΩ		
Voltage	± 75 mV, R _{inp.} > 100 kΩ ± 300 mV, R _{inp.} > 100 kΩ ± 0...600 V, R _{inp.} > 3.5 MΩ	0.1%	change in ambient temperature ≤ ± 0.1% of the range
Current	± 40 mA, R _{inp.} < 4 Ω ± 5 A, R _{inp.} = 10 mΩ ± 10%	0.1%	

Intensity of current flowing through the resistance thermometer: < 400 μA

Resistance of wires connecting the resistance thermometer with the meter: < 20 Ω/1 wire

OUTPUTS

Output type	Features
Current analog output	1 or 2 programmable 0/4...20 mA; load resistance ≤ 500 Ω
Voltage analog output	1 or 2 programmable 0-10 V; load resistance ≥ 500 Ω
Relay output	4 relays; NOC voltageless contacts, maximal load: - voltage: 250 V a.c., 150 V d.c. - current: 5 A 30 V d.c., 250 V a.c. - resistive load: 1250 VA, 150 W
Open collector (OC) type	8 outputs of OC type: maximal load: - voltage: 5...30V d.c. - current: 25mA d.c.
Digital interface	interface type: RS-485; transmission protocol: MODBUS, RTU (8N2, 8E1, 801, 8N1) baud rate: 2400, 4800, 9600, 19200, 57600, 115200 b/s
Additional supply output	24 V d.c., maximal load 30 mA

EXTERNAL FEATURE

Readout field	2 x 4 -digits LED dispaly bargraph	7-segment digits of 7 mm high, measuring range -1999...9999 bargraph of 100 mm lenght: - 55 segments in three-colour version - 28 segments in seven-colour version Bargraph resolution: programmable
Overall dimensions	48 x 144 x 100 mm	
Weight	< 0.4 kg	panel cut-out: 44+0.5 x 137.5+0.5 mm
Protection grade (acc. to EN 60529)	from frontal side: IP50	from terminal side: IP20


RATED OPERATING CONDITIONS

Supply voltage	95...253 V a.c. 40...400 Hz; 90...300 V d.c. 20...40 V a.c. 40...400 Hz, 20...60 V d.c.	power consumption ≤ 13 VA
Temperature	ambient: -10...23...55°C	storage: -25...85°C
Relative humidity	< 95%	Condensation inadmissible

SAFETY AND COMPATIBILITY REQUIREMENTS


Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Pollution grade	2	
Installation category	III	
Maximal phase-to-earth operating voltage	• for input circuit: 600 V • for supply circuit: 300 V • for other circuits: 50 V	acc. to EN 61010-1
Altitude above sea level	< 2000 m	

ELECTRICAL CONNECTIONS

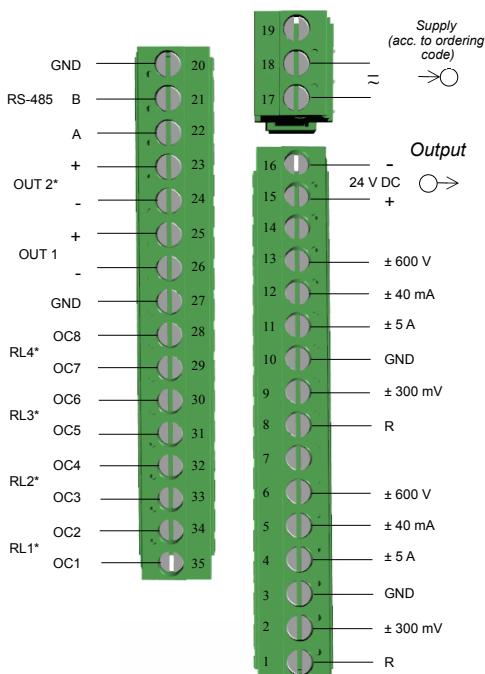


*-optional elements depend on the meter's version


Fig. 1 Description of the terminal strip.




8 open collector outputs (OC)

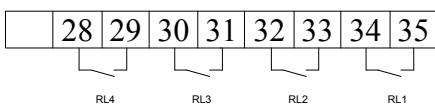

4 relay outputs



analog outputs
(voltage/current)



interface RS-485 (Modbus)

channel 2 8 | 9 | 10

channel 1 1 | 2 | 3

resistance thermometer
in a two-wire system or resistance
measurement

channel 2 8 | 9 | 10

channel 1 1 | 2 | 3

resistance thermometer
in a three-wire system

channel 2 9 | 10

channel 1 2 | 3

thermocouple
or voltage ± 75mV, ±300 mV

channel 2 10 | 11 | 12 | 13

channel 1 3 | 4 | 5 | 6

voltage input ± 10 V, ±600 V

channel 2 10 | 11 | 12 | 13

channel 1 3 | 4 | 5 | 6

current input ± 40 mA

channel 2 10 | 11 | 12 | 13


channel 1 3 | 4 | 5 | 6

current input ± 5 A

channel 2 ±40 mA 24 V d.c.

channel 1 10 | 12 | 15 | 16

channel 1 3 | 5 | 15 | 16




two-wire object transducer

channel 2 ±40 mA 24 V d.c.

channel 1 10 | 12 | 15 | 16

channel 1 3 | 5 | 15 | 16



three-wire object transducer

Fig.3. Connection way of output signals
depending on the execution code.

Fig.2 Connection way of input signals.

ORDERING

NA6PLUS -	X	XX	X	X	X	X	XX	X	X
Bargraph colour:									
3-colour(R, G, R+G)	T								
7-colour (R, G, B, R+G, R+B, G+B, R+G+B)	M								
Display colour on channels 1 and 2:									
red-red	RR								
red-green	RG								
green-red	GR								
green-green	GG								
Input signal:									
universal input	U								
custom-made*	X								
Analog output:									
lack	0								
0/4...20mA	1								
0...10V	2								
2 x 0/4...20 mA	3								
2 x 0...10V	4								
1 x 0/4...20 mA, 1 x 0...10 V	5								
Additional output:									
lack	0								
4 relays	4								
8 outputs of OC type	8								
Supply voltage:									
95...253 V a.c./d.c.	1								
20...40 V a.c., 20...60 V d.c.	3								
Version:									
standard	00								
custom-made**	XX								
Language:									
Polish	P								
English	E								
other*	X								
Acceptance tests:									
without extra requirements	0								
with an extra quality inspection certificate	1								
acc. to customer's request**	X								

* - after agreeing with the manufacturer

Odering example:

The code **NA6PLUS- TRRU18100E0** means:

NA6PLUS - NA6PLUS meter
T - bargraph RG
RR - red display coulr
U - universal inputs
1 - current output 0/4...20 mA
8 - 8 outputs of OC type
1 - supply 95...253V a.c./ 90...300V d.c.
00 - standard version
E - english version
0 - without extra requirements

For more information about Lumel products
please visit our website:

www.lumel.com.pl

Join us at Facebook!



NA6Plus-19A_en



LUMEL
EVERYTHING COUNTS

LUMEL S.A.

ul. Sulechowska 1, 65-022 Zielona Góra, POLAND
tel.: +48 68 45 75 100, fax +48 68 45 508
www.lumel.com.pl

Export department:

tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386
fax.: (+48 68) 32 54 091
e-mail: export@lumel.com.pl